

3 Pole Connector 3極高電圧コネクタ

常用 AC5KV

Specification

Current rating : 1.5A
 Dielectric Strength : AC10kV 1 minute at sea level
 Insulation Resistance : DC1000V 100000MΩ min
 Contact Resistance : 15mΩ max
 Temperature range : -10℃~+80℃

Material

Insulator : Unilate, glass filled, Black
 Plug pin : Brass, Gold plating over Ni Plating
 Contact : Beryllium Copper, Heat treated
 Gold Plated over Ni plating
 Sleeve, Brass, Gold Plating over Ni plating

<p style="text-align: center;">Plug プラグ</p> <p style="text-align: center;">付属品 プラスチックM3ボルトネジ 2本</p> <div style="border: 1px solid black; padding: 5px; text-align: center; margin-top: 10px;"> 適合電線 AWG#18~20 最大外径4.5 </div>	<p style="text-align: center;">Socket ソケット</p> <p style="text-align: center;">付属品 プラスチックM3ボルトネジ 樹脂ワッシャー ナット 各2本</p> <div style="border: 1px solid black; padding: 5px; text-align: center; margin-top: 10px;"> 適合電線 AWG#18~20 最大外径4.5 </div>
---	---

How to order

ケーブル付で供給させていただきます

HAY-P-3P-10 - □□□□


長さ mm

コネクタ品番指定

Plug : HAY-P-3P-10

Socket : HAY-S-3P-10

長さ指定 (mm)

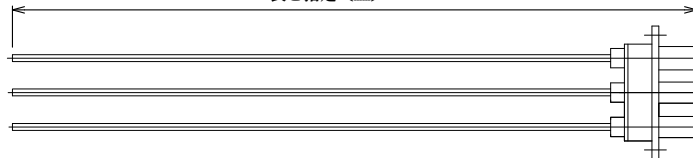

ご推奨電線 品番: **CABLE-3239B**

サイズ	耐電圧	温度	絶縁厚さ	外径	絶縁材色、材料
AWG20	DC30KV	150℃max	1.75mm	4.3mm	白、シリコン

