

### 3 Pole Connector 3極高電圧コネクタ

常用 AC5KV

**Specification**

Current rating : 1.5A  
 Dielectric Strength : AC10kV 1 minute at sea level  
 Insulation Resistance : DC1000V 100000MΩ min  
 Contact Resistance : 15mΩ max  
 Temperature range : -10℃~+80℃

**Material**

Insulator : Unilate, glass filled, Black  
 Plug pin : Brass, Gold plating over Ni Plating  
 Contact : Beryllium Copper, Heat treated  
 Gold Plated over Ni plating  
 Sleeve, Brass, Gold Plating over Ni plating

<p style="text-align: center;">Plug プラグ</p> <p style="text-align: center;">付属品 プラスチックM3ボルトネジ 2本</p> <div style="border: 1px solid black; padding: 5px; text-align: center; margin-top: 10px;">                 適合電線                  AWG#18~20 最大外径4.5             </div>	<p style="text-align: center;">Socket ソケット</p> <p style="text-align: center;">付属品 プラスチックM3ボルトネジ 樹脂ワッシャー ナット 各2本</p> <div style="border: 1px solid black; padding: 5px; text-align: center; margin-top: 10px;">                 適合電線                  AWG#18~20 最大外径4.5             </div>
---	---

**How to order**

ケーブル付で供給させていただきます

**HAY-P-3P-10 - □□□□**


長さ mm

コネクタ品番指定

**Plug : HAY-P-3P-10**

**Socket : HAY-S-3P-10**

長さ指定 (mm)

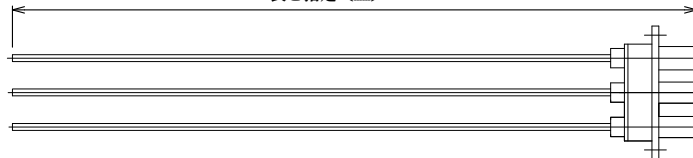

ご推奨電線 品番: **CABLE-3239B**

サイズ	耐電圧	温度	絶縁厚さ	外径	絶縁材色、材料
AWG20	DC30KV	150℃max	1.75mm	4.3mm	白、シリコン

