

### 3 Pole Connector 3極高電圧コネクタ


常用 AC7.5KV

**Specification**

Current rating: 1.5A  
 Dielectric Strength: AC15KV 1 minute at sea level  
 Insulation Resistance: DC1000V 100MΩ min  
 Contact Resistance: 15mΩ max  
 Temperature range: -10℃~+80℃

**Material**

Insulator : Unilate, glass filled, Black  
 Plug pin : Brass, Gold plating over Ni Plating  
 Socket pin: Beryllium Copper, Heat treated  
 Gold Plated over Ni plating  
 Sleeve: Brass, Gold Plating over Ni plating

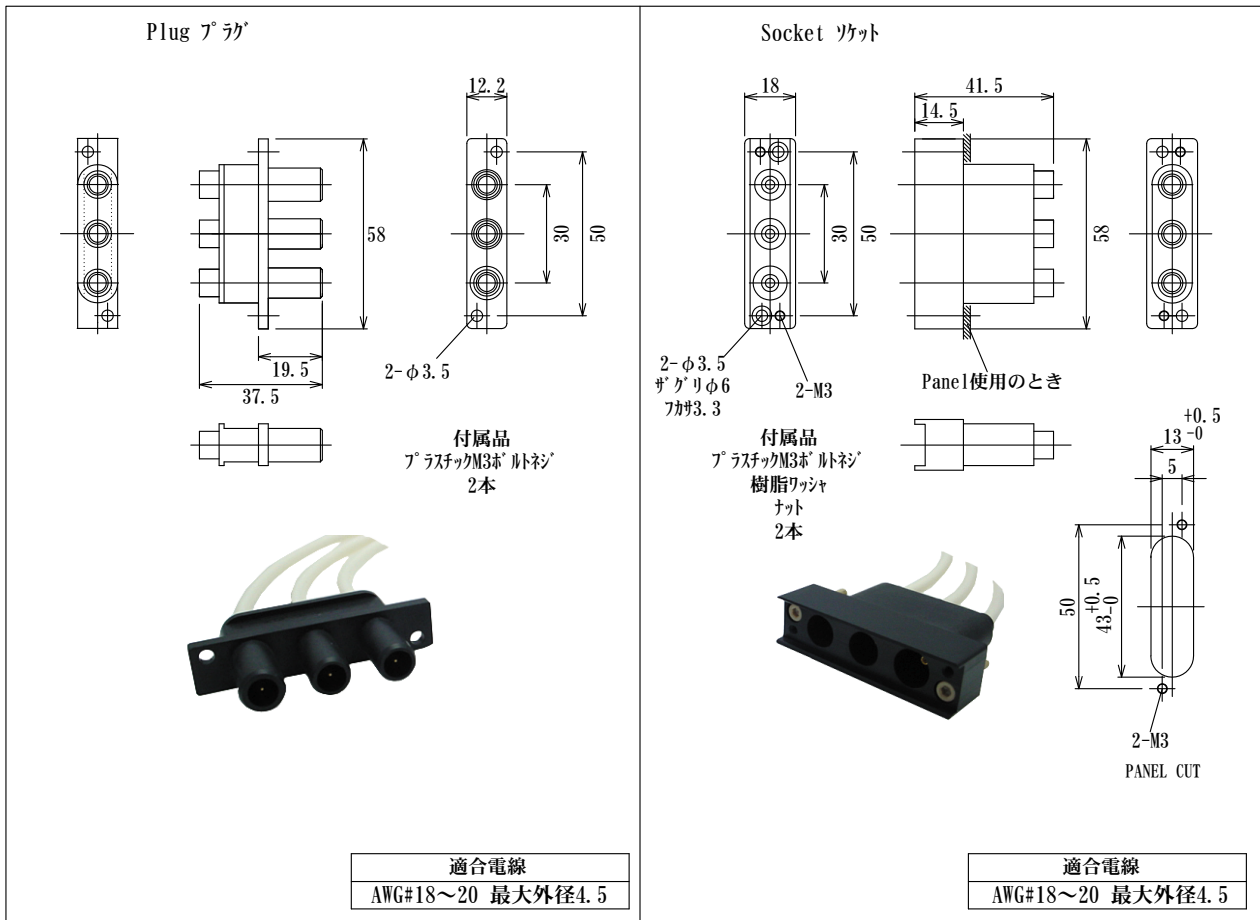

mm

**How to order**

ケーブル付で供給させていただきます

**HAY-S-3P-15** - □□□□

長さ mm

コネクタ品番指定

Plug : HAY-P-3P-15  
 Socket : HAY-S-3P-15

長さ指定 (mm)

