

高電流プローブピン High Current probe pin

Specifications

Pre load : 1.13N/115gf
 Load : 2.89N/295gf at 4.0mm travel
 Full travel : 6.0mm
 Working travel : 4.0mm

Materials

Barrel : Copper alloy
 Plunger : Beryllium copper
 Coil spring : Stainless steel
 Ball : Steel, Ni plating
 Receptacle : Copper alloy





Tip type

CRN	SPH
多点クラウン Multipoint Crown	丸 Spherical
20A max	20A max

88YH-F234-L335-CRN

Plunger 先端形状
 Tip type (see table left)
 CRN SPH

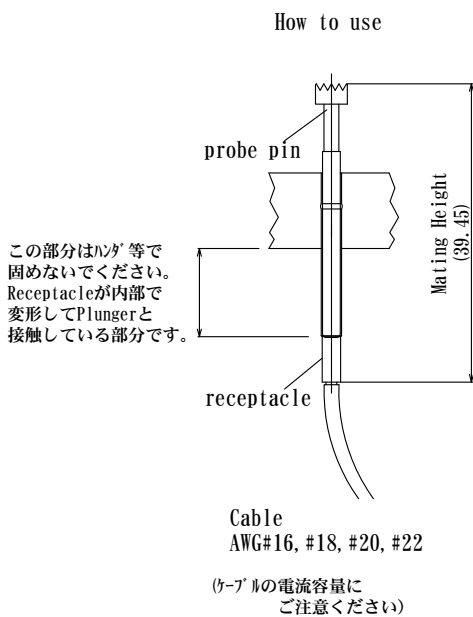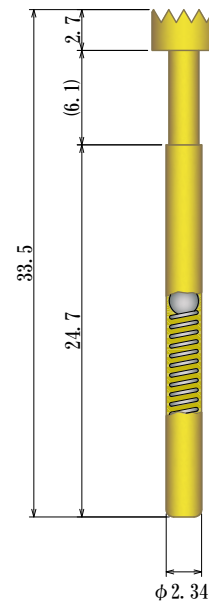

Receptacle

88YH-F234-L305-SKT

