

高電流プローブピン High Current probe pin

Specifications

Pre load : 1.25N/127gf
 Load : 2.52N/257gf at 4.0mm travel
 Full travel : 6.0mm
 Working travel : 4.0mm

Materials

Barrel : Copper alloy
 Plunger : Beryllium copper
 Coil spring : Stainless steel
 Ball : Steel, Ni plating
 Receptacle : Copper alloy




Tip type

CRN	SPH
多点クラウン Multipoint Crown	丸 Spherical
20A max	20A max

88YH-F234-L335-CRN


Plunger 先端形状
 Tip type (see table left)
 CRN SPH

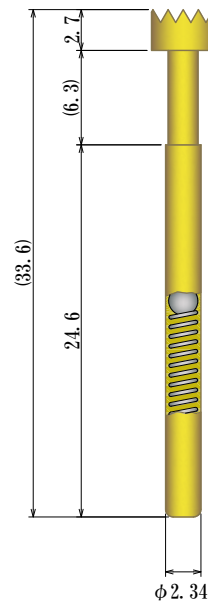

Receptacle

88YH-F234-L305-SKT


How to use

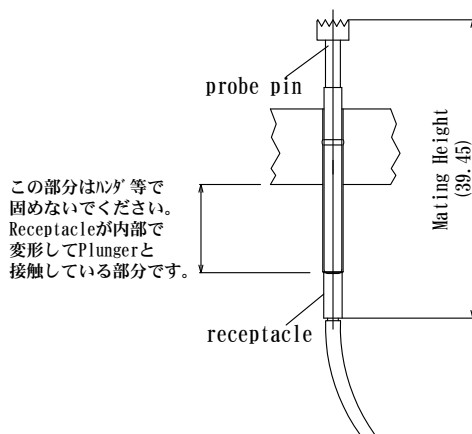

この部分はハグ等で固めないでください。Receptacleが内部で変形してPlungerと接触している部分です。

Cable
 AWG#16, #18, #20, #22

(ケーブルの電流容量にご注意ください)

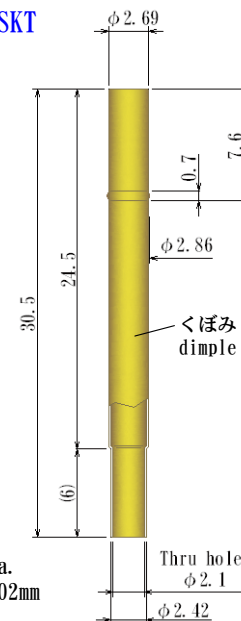

Mounting hole dia.
 : φ2.77±0.02mm

Thru hole
 φ2.1