


太めソケット, 高電流デバイス測定用 貫通ソケット
Medium size Socket for Power IC

2.54mm/0.101" pitch

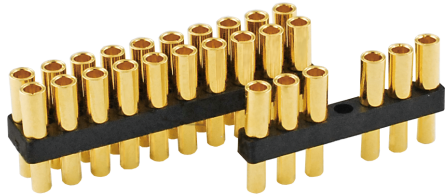

How to order

PDSP-□□□-S □□ GG

Code
See below

Number of positions : P

Single in line : 02, 03, 04, 06, 07,
08, 09, 10, 12

Dual in line : 04, 12, 20 (even number)


S : Single

D : Dual


表示の無い極数については、別途お問い合わせください。
Regarding other number of positions, please feel free to ask us.

Code	Parts Number		(Socket Pin P/N)	Contact depth (d)	Technical Data /page
CM1	PDSP-CM1-S□□-GG	Single	(PDP20CM1-L158-GG)	3.4	Fig. 3/8H3
	PDSP-CM1-D□□-GG	Dual	(PDP20CM1-L158-GG)		
1081	PDSP-1081-S□□-GG	Single	(PDP201081-L158-GG)	3.8	Fig. 5/8H4
	PDSP-1081-D□□-GG	Dual	(PDP201081-L158-GG)		


Single in line

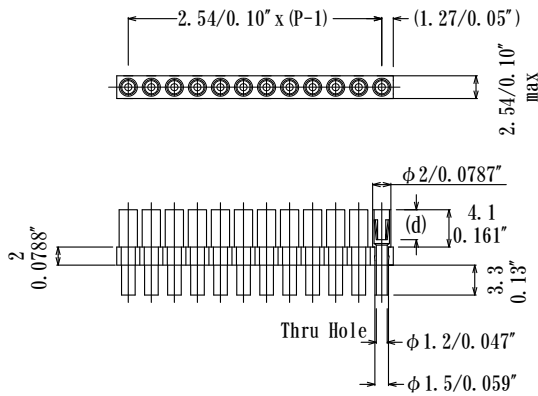


PC Board layout



Dual in line

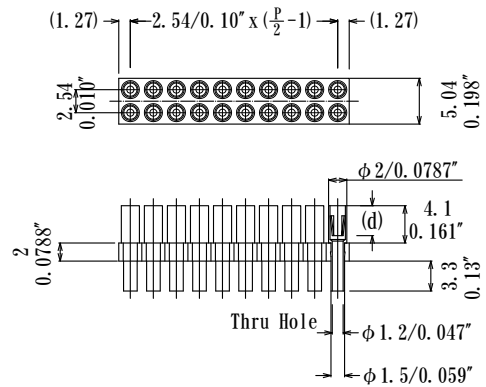

PC Board layout



Tolerance: ±0.05

How to use

