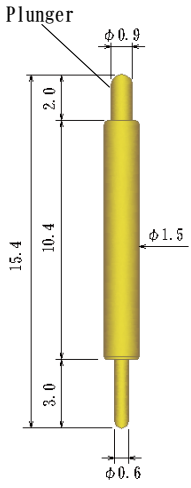

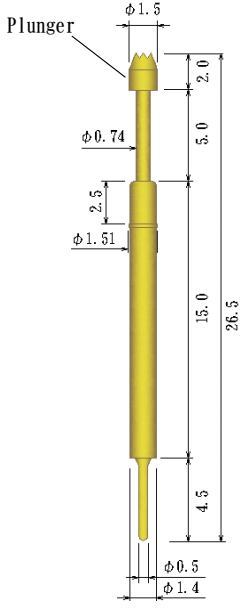
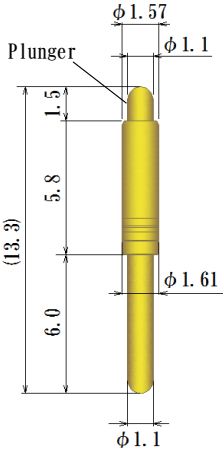
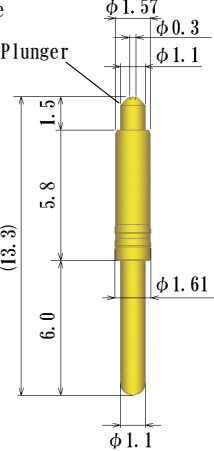
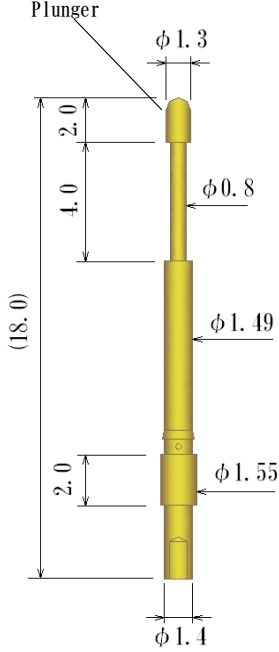


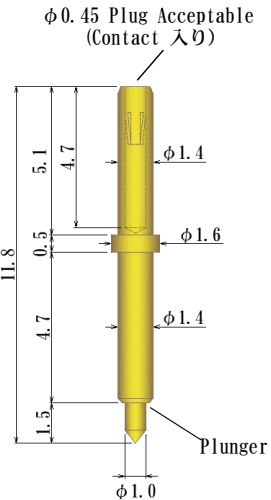
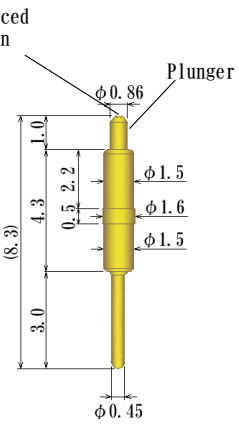
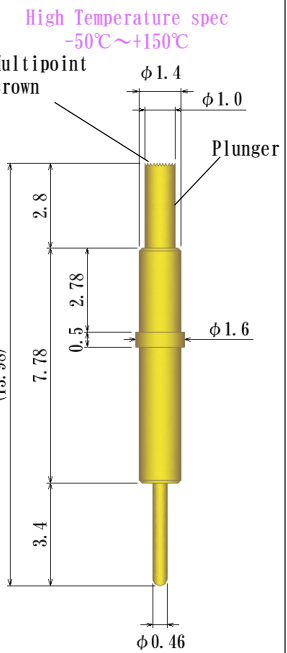


Single ended probe pin 片端プローブピン
 Outer Dia. $\phi 1.3 \sim \phi 1.69\text{mm} / \phi 0.0512 \sim \phi 0.0665''$

 <p>Preload 0.078N (2.0gf) 0.20N (20gf) at 1.0mm travel Full travel 2.0mm Current rating 1.5A</p> <p>8YJ15104G</p>	<p>High Temperature spec $-40^{\circ}\text{C} \sim +150^{\circ}\text{C}$</p>  <p>Preload 0.08N (8gf) 0.44N (45gf) at half travel Current rating 1.5A</p> <p>8YJ-E1001-00</p>	 <p>Preload 0.14N (14gf) 0.29N (30gf) at 2/3 travel Current rating 1.5A</p> <p>8YJ-15265G-HD-03</p>	
<p>High Temperature spec $-40^{\circ}\text{C} \sim +150^{\circ}\text{C}$</p>  <p>Preload 0.17N (17.4gf) 0.397N (40.5gf) at 0.4mm travel Full travel 1.5mm Current rating 1.5A</p> <p>88YN1130G</p>	<p>High Temperature spec $-40^{\circ}\text{C} \sim +150^{\circ}\text{C}$</p> <p>4 point Reduced crown type</p>  <p>Preload 0.17N (17.4gf) 0.397N (40.5gf) at 0.4mm travel Full travel 1.5mm Current rating 1.5A</p> <p>88YN1130G-TPCRN</p>	 <p>0.98N (100gf) at 2.0mm travel Current rating 1.5A</p> <p>8YDOS001</p>	

Single ended probe pin 片端プローブピン
Outer Dia. $\phi 1.3 \sim \phi 1.69\text{mm} / \phi 0.0512 \sim \phi 0.0665''$

 <p>Plunger inside type</p>	<table border="1"> <thead> <tr> <th>Part No.</th> <th>Preload</th> <th>Recommended travel</th> <th>Current rating</th> </tr> </thead> <tbody> <tr> <td>8YJ-R0101-02-80</td> <td>0.23N (23gf)</td> <td>0.79N (80gf) at 0.5 travel</td> <td rowspan="2">1.5A</td> </tr> <tr> <td>8YJ-R0101-02-120</td> <td>0.04N (4.5gf)</td> <td>1.18N (120gf) at 0.5mm travel</td> </tr> </tbody> </table>		Part No.	Preload	Recommended travel	Current rating	8YJ-R0101-02-80	0.23N (23gf)	0.79N (80gf) at 0.5 travel	1.5A	8YJ-R0101-02-120	0.04N (4.5gf)	1.18N (120gf) at 0.5mm travel							
Part No.	Preload	Recommended travel	Current rating																	
8YJ-R0101-02-80	0.23N (23gf)	0.79N (80gf) at 0.5 travel	1.5A																	
8YJ-R0101-02-120	0.04N (4.5gf)	1.18N (120gf) at 0.5mm travel																		
 <p>Plunger</p>	<table border="1"> <thead> <tr> <th>Part No.</th> <th>Preload</th> <th>Recommended travel</th> <th>Full travel</th> <th>Current rating</th> </tr> </thead> <tbody> <tr> <td>8YJ-R1001-00</td> <td>0.37N (38gf)</td> <td>1.30N (132gf) at 0.5mm travel</td> <td>0.8mm</td> <td rowspan="3">1.5A</td> </tr> <tr> <td>8YJ-R1001-00-15</td> <td>0.04N (4.5gf)</td> <td>0.15N (15gf) at 0.5mm travel</td> <td>1.0mm</td> </tr> <tr> <td>8YJ-R1001-00-30</td> <td>0.14N (14gf)</td> <td>0.29N (30gf) at 0.5mm travel</td> <td>1.0mm 標準品</td> </tr> </tbody> </table>		Part No.	Preload	Recommended travel	Full travel	Current rating	8YJ-R1001-00	0.37N (38gf)	1.30N (132gf) at 0.5mm travel	0.8mm	1.5A	8YJ-R1001-00-15	0.04N (4.5gf)	0.15N (15gf) at 0.5mm travel	1.0mm	8YJ-R1001-00-30	0.14N (14gf)	0.29N (30gf) at 0.5mm travel	1.0mm 標準品
Part No.	Preload	Recommended travel	Full travel	Current rating																
8YJ-R1001-00	0.37N (38gf)	1.30N (132gf) at 0.5mm travel	0.8mm	1.5A																
8YJ-R1001-00-15	0.04N (4.5gf)	0.15N (15gf) at 0.5mm travel	1.0mm																	
8YJ-R1001-00-30	0.14N (14gf)	0.29N (30gf) at 0.5mm travel	1.0mm 標準品																	
 <p>$\phi 0.45$ Plug Acceptable (Contact 入り)</p> <p>Plunger</p> <p>Preload 0.03N (3gf) 0.29N (30gf) at 1.0mm travel Full travel 1.5mm Current rating 1.5A</p> <p>8YF150L102-NZ</p>	 <p>Reduced Crown</p> <p>Plunger</p> <p>0.213N (22gf) at 0.6mm ravel Full travel 1.0mm Current rating 1.5A</p> <p>8YJ1543G-TPCRN20G</p>	 <p>High Temperature spec -50°C ~ +150°C</p> <p>Multipoint Crown</p> <p>Plunger</p> <p>0.344N (35gf) at 0.7mm ravel Full travel 1.2mm Current rating 1.5A</p> <p>8YF160L139-35G</p>																		