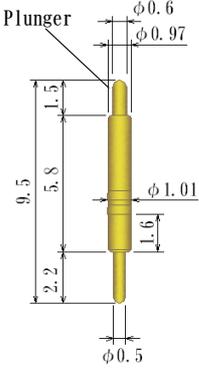
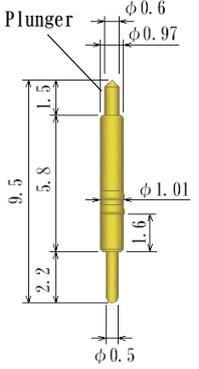
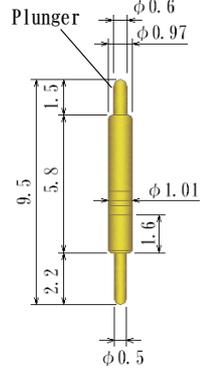

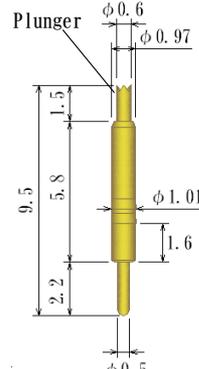
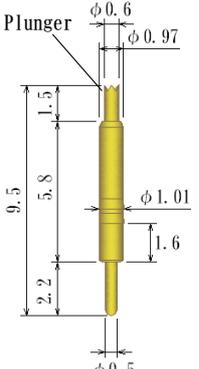
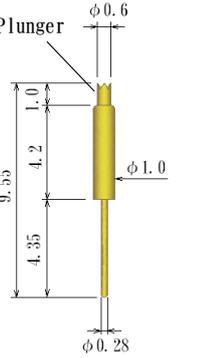
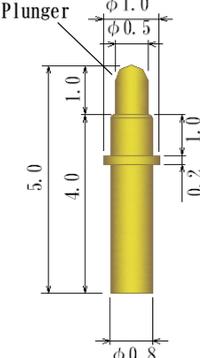
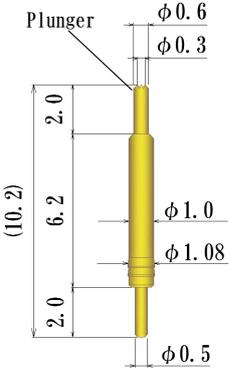


Single ended probe pin 片端プローブピン
Outer Dia. $\phi 1.0 \sim \phi 1.29\text{mm} / \phi 0.0394 \sim \phi 0.0508''$

<p>High Temperature spec -40°C ~ +150°C</p>  <p>Preload 0.13N (13.6gf) 0.59N (60gf) at 1.0mm travel Full travel 1.5mm Current max 2A</p> <p>8YN1058G</p>	<p>High Temperature spec -40°C ~ +150°C</p>  <p>Preload 0.13N (13.6gf) 0.59N (60gf) at 1.0mm travel Full travel 1.5mm Current max 2A</p> <p>8YN1058-C0N * 受注生産品</p>	<p>High Temperature spec -40°C ~ +150°C</p>  <p>Preload 0.075N (7.5gf) 0.3N (31gf) at 1.0mm travel Full travel 1.5mm Current max 1.2A</p> <p>8YN1058G-30</p>	<p>High Temperature spec -40°C ~ +150°C</p>  <p>Preload 0.114N (11gf) 0.343N (35gf) at 0.4mm travel Full travel 0.6mm Current rating 1.2A</p> <p>8YN1030G-034BI</p>
<p>High Temperature spec -40°C ~ +150°C</p>  <p>Preload 0.075N (7.5gf) 0.3N (31gf) at 1.0mm travel Full travel 1.5mm Current max 1.2A</p> <p>8YN1058G-30-CRN</p>	<p>High Temperature spec -40°C ~ +150°C</p>  <p>Preload 0.133N (13.6gf) 0.588N (60gf) at 1.0mm travel Full travel 1.5mm Current max 2A</p> <p>8YN1058G-CRN-SI</p>	<p>4 point crown type</p>  <p>Preload 0.10N (10gf) 0.29N (30gf) at 0.4mm travel Full travel 1.0mm Current max 1.2A</p> <p>8YF100L955</p>	 <p>Preload 0.035N (3.6gf) 0.127N (13gf) at 0.5mm travel Full travel 1.0mm Current max 1.2A</p> <p>8YF100L50-KS</p>

Single ended probe pin 片端プローブピン
 Outer Dia. 1.0~ 1.29mm/ 0.0394~ 0.0508"

<p>High Temperature spec -40°C~+150°C</p>  <p>0.78N (80gf) at 1.5mm travel Full travel 1.7mm Current max 1.2A</p> <p>8YK-F100L102S-TPC</p>			