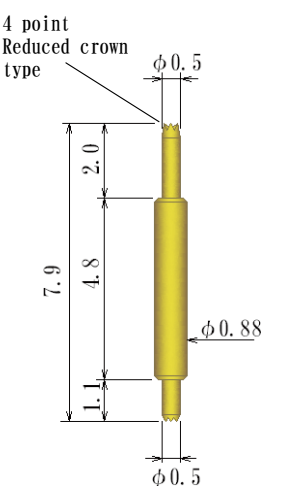
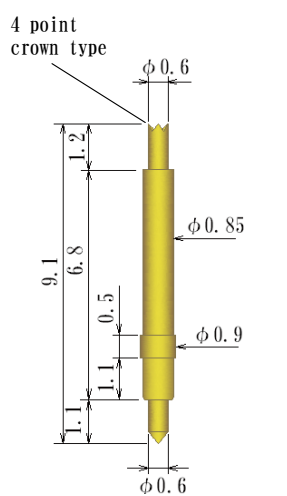
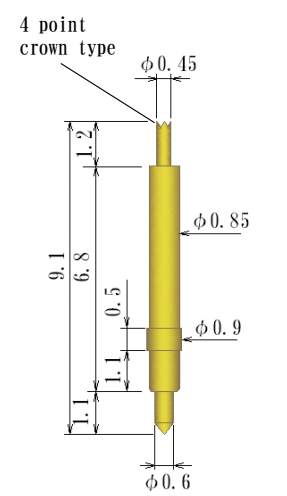
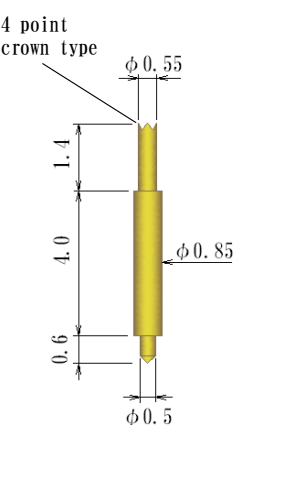
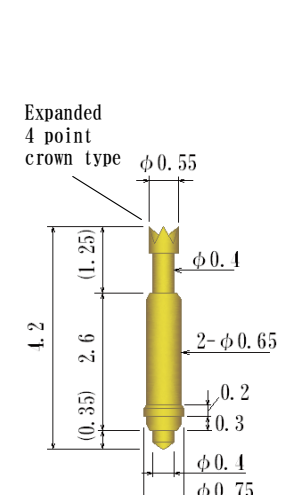
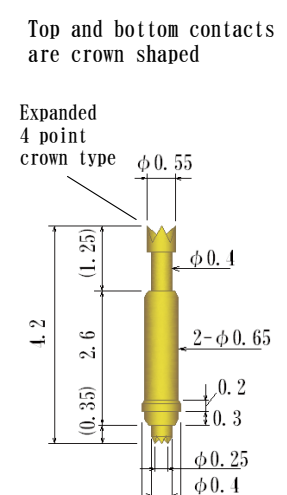
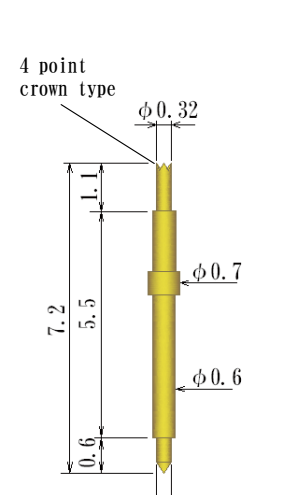
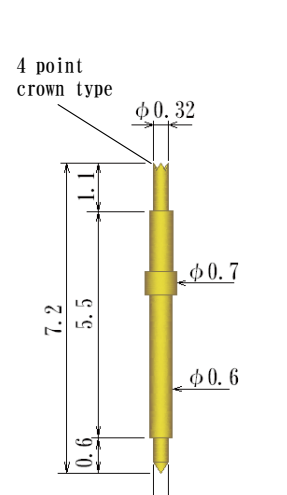
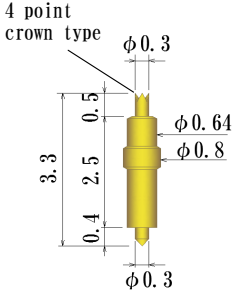
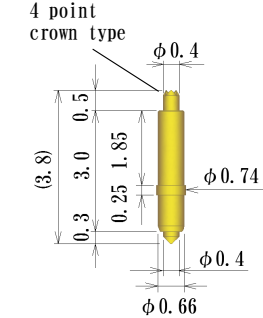
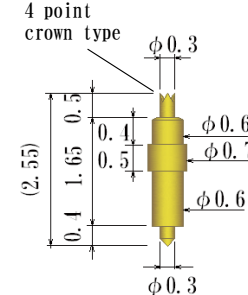
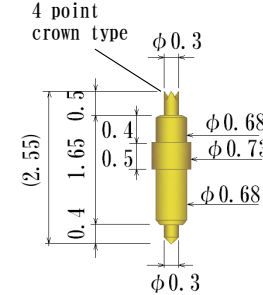
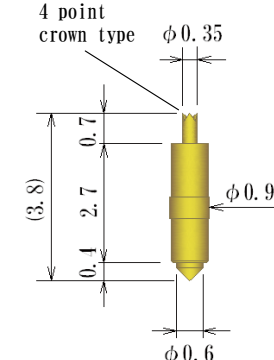
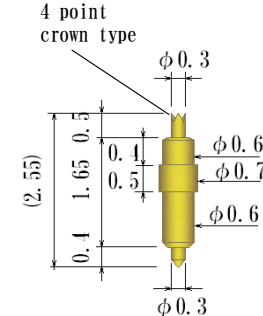
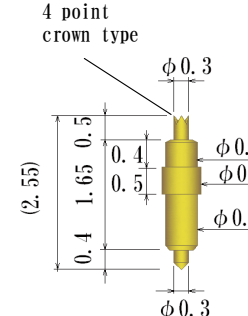
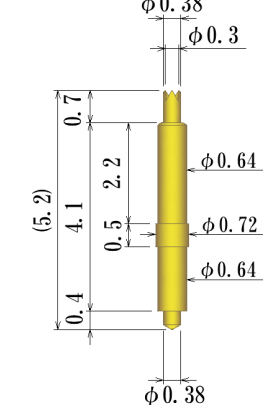


Double ended probe pin 両端プローブピン
Outer Dia. $\phi 0.70 \sim \phi 0.99\text{mm} / \phi 0.0276 \sim \phi 0.0390''$

 <p>4 point Reduced crown type</p> <p>$\phi 0.5$ $\phi 0.88$ $\phi 0.5$</p> <p>7.9 4.8 2.0 1.1</p> <p>0.29N (30gf) at 1.0mm travel Full travel 1.4mm Current rating 1A</p> <p>8YN88D20S</p>	 <p>4 point crown type</p> <p>$\phi 0.6$ $\phi 0.85$ $\phi 0.9$ $\phi 0.6$</p> <p>9.1 6.8 1.2 0.5 1.1 1.1</p> <p>Preload 0.04N (4gf) 0.29N (30gf) at 0.9mm travel Full travel 1.5mm Current rating 1A</p> <p>8YF90L91-AUI</p>	 <p>4 point crown type</p> <p>$\phi 0.45$ $\phi 0.85$ $\phi 0.9$ $\phi 0.6$</p> <p>9.1 6.8 1.2 0.5 1.1 1.1</p> <p>Preload 0.04N (4gf) 0.29N (30gf) at 0.9mm travel Full travel 1.5mm Current rating 1A</p> <p>8YF90L91-F045-AUI (88Y-90L91-F045-AU)</p>	 <p>4 point crown type</p> <p>$\phi 0.55$ $\phi 0.85$ $\phi 0.5$</p> <p>1.4 4.0 0.6</p> <p>Preload 0.06N (6gf) 0.28N (29gf) at 0.9mm travel Current rating 1A</p> <p>8YJ8540G</p>
 <p>Expanded 4 point crown type</p> <p>$\phi 0.55$ $\phi 0.4$ 2-$\phi 0.65$ 0.2 0.3 $\phi 0.4$ $\phi 0.75$</p> <p>4.2 1.25 2.6 0.35</p> <p>Preload 0.079N (8gf) 0.37N (37gf) at 0.73mm travel Full travel 0.95mm Current rating 0.7A</p> <p>8Y065-42L10-FJ-SI</p>	<p>Top and bottom contacts are crown shaped</p>  <p>Expanded 4 point crown type</p> <p>$\phi 0.55$ $\phi 0.4$ 2-$\phi 0.65$ 0.2 0.3 $\phi 0.25$ $\phi 0.4$ $\phi 0.75$</p> <p>4.2 1.25 2.6 0.35</p> <p>Preload 0.079N (8gf) 0.37N (37gf) at 0.73mm travel Full travel 0.95mm Current rating 0.7A</p> <p>8Y065W-42L10-FJ-SI</p>	 <p>4 point crown type</p> <p>$\phi 0.32$ $\phi 0.7$ $\phi 0.6$ $\phi 0.32$</p> <p>7.2 5.5 1.1 0.6</p> <p>Preload 0.04N (4gf) 0.29N (30gf) at 0.9mm travel Full travel 1.7mm Current rating 0.7A</p> <p>8YF70L72</p>	 <p>4 point crown type</p> <p>$\phi 0.32$ $\phi 0.7$ $\phi 0.6$ $\phi 0.32$</p> <p>7.2 5.5 1.1 0.6</p> <p>0.392N (40gf) at 0.9mm travel Full travel 1.2mm Current rating 0.7A</p> <p>8YF70L72-AU</p>

Double ended probe pin 両端プローブピン
Outer Dia. $\phi 0.70 \sim \phi 0.99\text{mm} / \phi 0.0276 \sim \phi 0.0390''$

 <p>4 point crown type</p> <p>0.1N (10gf) at 0.9mm travel Full travel 0.9mm Current rating 0.5A</p> <p>8YF80L33-CRCNI</p>	<p>High Temperature spec $-40^{\circ}\text{C} \sim +150^{\circ}\text{C}$</p>  <p>4 point crown type</p> <p>0.218N (22.2gf) at 0.50mm travel Full travel 0.6mm Current rating 0.5A</p> <p>8YF74L38-22G</p>	 <p>4 point crown type</p> <p>Preload 0.037N (3.77gf) 0.12N (12.24gf) at 0.55mm travel Full travel 0.6mm Current rating 0.5A</p> <p>8YF70L255-12GI</p> <p style="text-align: right;">標準品</p>	 <p>4 point crown type</p> <p>Preload 0.043N (4.38gf) 0.137N (14.07gf) at 0.55mm travel Full travel 0.6mm Current rating 0.5A</p> <p>8YF73L255-14GI</p> <p style="text-align: right;">標準品</p>
 <p>4 point crown type</p> <p>0.343N (35gf) at 0.45mm travel Full travel 0.6mm Current rating 1A</p> <p>8YF90L38-AU</p>	<p>High Temperature spec $-40^{\circ}\text{C} \sim +150^{\circ}\text{C}$</p>  <p>4 point crown type</p> <p>Preload 0.027N (2.8gf) 0.12N (12.24gf) at 0.55mm travel Full travel 0.6mm Current rating 0.5A</p> <p>8YF70L255-12G-SUS-L</p>	<p>High Temperature spec $-40^{\circ}\text{C} \sim +150^{\circ}\text{C}$</p>  <p>4 point crown type</p> <p>Preload 0.032N (3.3gf) 0.137N (14.07gf) at 0.55mm travel Full travel 0.6mm Current rating 0.5A</p> <p>8YF73L255-14G-SUS-L</p>	<p>High Temperature spec $-40^{\circ}\text{C} \sim +150^{\circ}\text{C}$</p>  <p>4 point crown type</p> <p>0.32N (33gf) at 0.65mm travel Full travel 1.0mm Current rating 0.7A</p> <p>8YF72L52-TP33G</p>

Double ended probe pin 両端プローブピン
Outer Dia. $\phi 0.70 \sim \phi 0.99\text{mm} / \phi 0.0276 \sim \phi 0.0390''$

<p>4 point Reduced crown type</p> <p>$\phi 0.38$</p> <p>0.76</p> <p>0.5</p> <p>1.9</p> <p>4.3</p> <p>(5.82)</p> <p>$\phi 0.64$</p> <p>$\phi 0.72$</p> <p>$\phi 0.64$</p> <p>$\phi 0.38$</p> <p>0.359N (36.6gf) at 0.75mm travel Full travel 0.9mm Current rating 0.7A</p> <p>8YF72L60-TP35-BI</p>	<p>Palladium Alloy</p> <p>$\phi 0.38$</p> <p>0.76</p> <p>0.5</p> <p>1.9</p> <p>4.3</p> <p>(5.82)</p> <p>$\phi 0.64$</p> <p>$\phi 0.72$</p> <p>$\phi 0.64$</p> <p>$\phi 0.38$</p> <p>0.359N (36.6gf) at 0.75mm travel Full travel 0.9mm Current rating 0.7A</p> <p>8YF72L60-TP35-PDEE</p>	<p>4 point crown type</p> <p>$\phi 0.38$</p> <p>0.76</p> <p>0.5</p> <p>1.9</p> <p>4.3</p> <p>(5.82)</p> <p>$\phi 0.64$</p> <p>$\phi 0.72$</p> <p>$\phi 0.64$</p> <p>$\phi 0.38$</p> <p>0.359N (36.6gf) at 0.75mm travel Full travel 0.9mm Current rating 0.7A</p> <p>8YF72L60-TPCRN35</p>	<p>4 point crown type</p> <p>$\phi 0.45$</p> <p>0.6</p> <p>1.3</p> <p>4.1</p> <p>(6.0)</p> <p>$\phi 0.85$</p> <p>$\phi 0.45$</p> <p>0.296N (30.2gf) at 0.8mm travel Full travel 1.3mm Current rating 1A</p> <p>8YF85L60G-SA-AI</p>
<p>4 point crown type</p> <p>$\phi 0.45$</p> <p>0.6</p> <p>1.3</p> <p>4.1</p> <p>(6.0)</p> <p>$\phi 0.85$</p> <p>$\phi 0.45$</p> <p>0.343N (35gf) at 0.8mm travel Full travel 1.1mm Current rating 1A</p> <p>8YF85L60G-SA-ABI</p>	<p>4 point crown type</p> <p>$\phi 0.88$</p> <p>$\phi 0.5$</p> <p>1</p> <p>1.7</p> <p>4.8</p> <p>(7.5)</p> <p>$\phi 0.9$</p> <p>$\phi 0.82$</p> <p>$\phi 0.5$</p> <p>0.293N (29.9gf) at 0.9mm travel Full travel 1.3mm</p> <p>8YF88L75-MI</p>	<p>4 point Reduced crown type</p> <p>$\phi 0.4$</p> <p>0.8</p> <p>0.5</p> <p>1.0</p> <p>4.1</p> <p>(5.7)</p> <p>$\phi 0.82$</p> <p>$\phi 0.9$</p> <p>$\phi 0.82$</p> <p>$\phi 0.5$</p> <p>0.196N (20gf) at 0.8mm travel Full travel 1.1mm Current rating 1A</p> <p>8YF90L57-TG</p>	<p>4 point crown type</p> <p>$\phi 0.55$</p> <p>0.6</p> <p>1.0</p> <p>0.5</p> <p>4.4</p> <p>(6.0)</p> <p>$\phi 0.85$</p> <p>$\phi 0.91$</p> <p>$\phi 0.55$</p> <p>0.294N (30gf) at 0.8mm travel Full travel 1.0mm Current rating 1A</p> <p>8YF90L60-30G</p>

Double ended probe pin 両端プローブピン
Outer Dia. $\phi 0.70 \sim \phi 0.99\text{mm} / \phi 0.0276 \sim \phi 0.0390''$

<p>High Temperature spec -40°C ~ +150°C</p> <p>4 point Reduced crown type</p> <p>0.293N (29.9gf) at 2.0mm travel Full travel 3.0mm Current rating 1A</p> <p>8YF88L261-TPCI</p>	<p>High Temperature spec -40°C ~ +150°C</p> <p>4 point crown type</p> <p>0.293N (29.9gf) at 2.0mm travel Full travel 3.0mm Current rating 1A</p> <p>8YF88L261-SE-0</p>	<p>4 point crown type</p> <p>0.42N (42.8gf) at 1.6mm travel Full travel 2.6mm Current rating 1A</p> <p>8YF88L261-F090-CRW</p>	
<p>4 point Reduced crown type</p> <p>0.392N (40gf) at 0.9mm travel Full travel 1.2mm Current rating 0.7A</p> <p>8YF70L72-AUTP</p>	<p>4 point crown type</p> <p>0.294N (30gf) at 0.9mm travel Full travel 1.2mm Current rating 0.7A</p> <p>8YK-D70H-L97-11</p>	<p>4 point crown type</p> <p>0.195N (20gf) at 3.0mm travel Full travel 3.7mm</p> <p>8YF70L150-SUSI</p>	