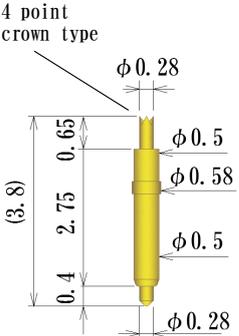
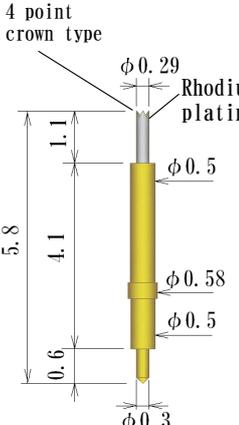
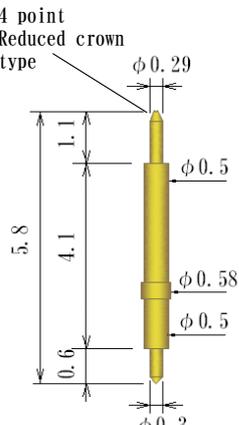
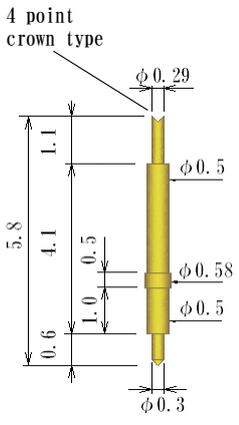
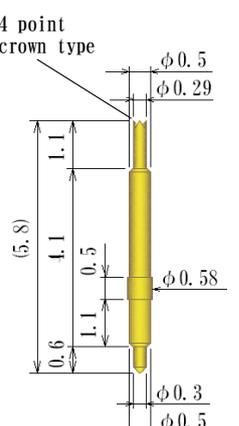
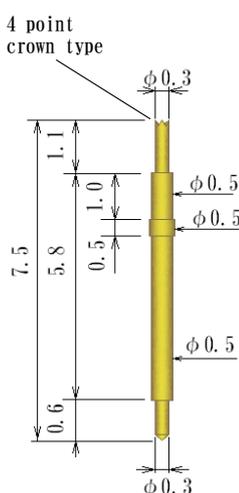
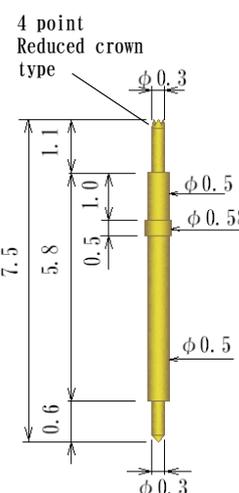
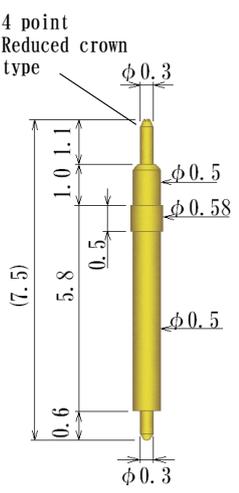
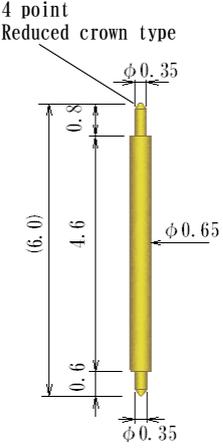
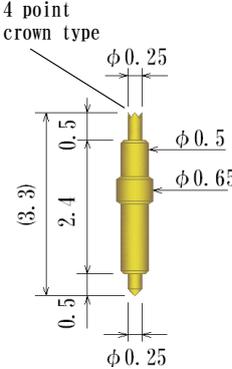
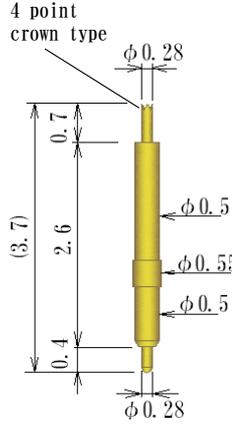
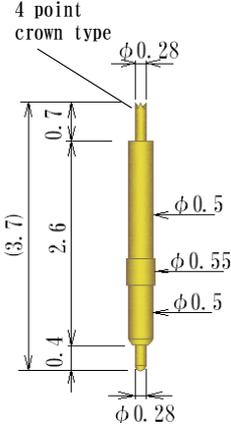
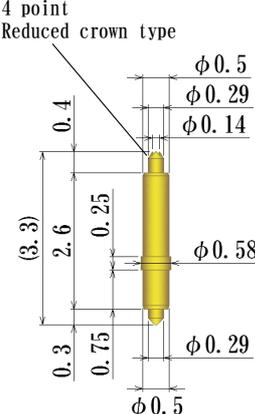






Double ended probe pin 両端プローブピン
Outer Dia. $\phi 0.50 \sim \phi 0.69\text{mm} / \phi 0.0197 \sim \phi 0.0272''$

 <p>4 point crown type</p> <p>$\phi 0.28$</p> <p>$\phi 0.5$</p> <p>$\phi 0.58$</p> <p>$\phi 0.5$</p> <p>$\phi 0.28$</p> <p>(3.8)</p> <p>0.4</p> <p>2.75</p> <p>0.65</p> <p>0.221N (22.5gf) at 0.7mm travel Full travel 0.8mm Current rating 0.5A</p> <p>8YF58L38-22G</p>	 <p>4 point crown type</p> <p>Rhodium plating</p> <p>$\phi 0.29$</p> <p>$\phi 0.5$</p> <p>$\phi 0.58$</p> <p>$\phi 0.5$</p> <p>$\phi 0.3$</p> <p>5.8</p> <p>1.1</p> <p>4.1</p> <p>0.6</p> <p>Preload 0.02N (2gf) 0.26N (26gf) at 0.9mm travel Full travel 1.3mm Current rating 0.5A</p> <p>8YF58L58G-RHI (88YF58L58G-RH)</p>	 <p>4 point Reduced crown type</p> <p>$\phi 0.29$</p> <p>$\phi 0.5$</p> <p>$\phi 0.58$</p> <p>$\phi 0.5$</p> <p>$\phi 0.3$</p> <p>5.8</p> <p>1.1</p> <p>4.1</p> <p>0.6</p> <p>Preload 0.07N (7gf) 0.29N (30gf) at 0.9mm travel Full travel 1.1mm Current rating 0.5A</p> <p>88YF58L58-AUTP</p>	 <p>4 point crown type</p> <p>$\phi 0.29$</p> <p>$\phi 0.5$</p> <p>$\phi 0.58$</p> <p>$\phi 0.5$</p> <p>$\phi 0.3$</p> <p>5.8</p> <p>1.1</p> <p>4.1</p> <p>0.5</p> <p>1.0</p> <p>0.6</p> <p>Preload 0.02N (2gf) 0.29N (30gf) at 0.9mm travel Full travel 1.5mm Current rating 0.5A</p> <p>8YF58L58G (88YF58L58G)</p>
 <p>4 point crown type</p> <p>$\phi 0.5$</p> <p>$\phi 0.29$</p> <p>$\phi 0.58$</p> <p>$\phi 0.3$</p> <p>$\phi 0.5$</p> <p>(5.8)</p> <p>1.1</p> <p>4.1</p> <p>0.5</p> <p>1.1</p> <p>0.6</p> <p>0.257N (26.2gf) at 0.9mm travel Full travel 1.3mm Current rating 0.5A</p> <p>8YF58L58G-AUI (88YF58L58G-AU)</p>	 <p>4 point crown type</p> <p>$\phi 0.3$</p> <p>$\phi 0.5$</p> <p>$\phi 0.58$</p> <p>$\phi 0.5$</p> <p>$\phi 0.3$</p> <p>7.5</p> <p>1.1</p> <p>5.8</p> <p>1.0</p> <p>0.5</p> <p>0.6</p> <p>Preload 0.06N (6gf) 0.29N (30gf) at 0.9mm travel Full travel 1.3mm Current rating 0.5A</p> <p>8YF58L75I</p>	 <p>4 point Reduced crown type</p> <p>$\phi 0.3$</p> <p>$\phi 0.5$</p> <p>$\phi 0.58$</p> <p>$\phi 0.5$</p> <p>$\phi 0.3$</p> <p>7.5</p> <p>1.1</p> <p>5.8</p> <p>1.0</p> <p>0.5</p> <p>0.6</p> <p>Preload 0.06N (6gf) 0.29N (30gf) at 0.9mm travel Full travel 1.3mm Current rating 0.5A</p> <p>8YF58L75-2I</p>	<p>High Temperature spec -40°C ~ +150°C</p>  <p>4 point Reduced crown type</p> <p>$\phi 0.3$</p> <p>$\phi 0.5$</p> <p>$\phi 0.58$</p> <p>$\phi 0.5$</p> <p>$\phi 0.3$</p> <p>(7.5)</p> <p>1.1</p> <p>5.8</p> <p>1.0</p> <p>0.5</p> <p>0.6</p> <p>0.294N (30gf) at 0.9mm travel Full travel 1.1mm Current rating 0.5A</p> <p>8YF58L75-2SUS</p>









Double ended probe pin 両端プローブピン
Outer Dia. $\phi 0.50 \sim \phi 0.69\text{mm} / \phi 0.0197 \sim \phi 0.0272"$

 <p>4 point Reduced crown type</p> <p>Preload 0.06N (6gf) 0.29N (30gf) at 0.8mm travel Full travel 1.1mm Current rating 0.7A</p> <p>8YF065L60I</p>	 <p>4 point crown type</p> <p>0.1N (10gf) at 0.9mm travel Full travel 0.9mm Current rating 0.5A</p> <p>8YF65L33-CRCNI</p>	 <p>4 point crown type</p> <p>0.27N (27.5gf) at 0.55mm travel Full travel 0.65mm Current rating 0.5A</p> <p>8YK-D50H-L37</p>	 <p>4 point crown type</p> <p>0.295N (30.1gf) at 0.55mm travel Full travel 0.65mm Current rating 0.5A</p> <p>8YK-D50H-L37-30G</p>
 <p>4 point Reduced crown type</p> <p>0.245N (25gf) at 0.4mm travel Full travel 0.55mm Current rating 0.5A</p> <p>8YK-D50H-L33EE</p>			

Double ended probe pin 両端プローブピン
Outer Dia. $\phi 0.50 \sim \phi 0.69\text{mm} / \phi 0.0197 \sim \phi 0.0272"$

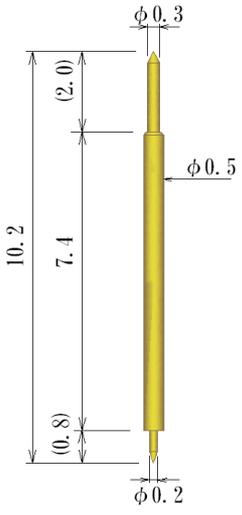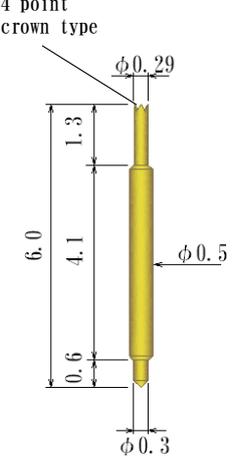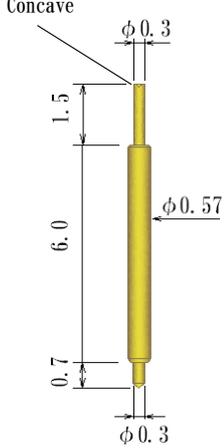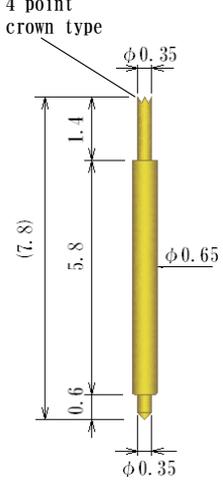 <p>0.18N (18gf) at 1.8mm travel Full travel 2.8mm Current rating 0.5A</p> <p>8YF50L102-2</p>	 <p>0.294N (30gf) at 0.8mm travel Full travel 1.3mm Current rating 0.5A</p> <p>8YF58L60G-SA-S</p>	 <p>Preload 0.07N (7gf) 0.22N (22gf) at 1.0mm travel Current rating 0.5A</p> <p>8YD57L82L-WG</p>	 <p>Preload 0.06N (6gf) 0.29N (30gf) at 0.9mm travel Full travel 1.3mm Current rating 0.7A</p> <p>8YF065L78-GI</p>

Double ended probe pin 両端プローブピン
Outer Dia. $\phi 0.50 \sim \phi 0.69\text{mm} / \phi 0.0197 \sim \phi 0.0272"$

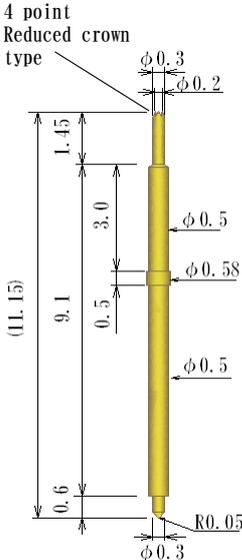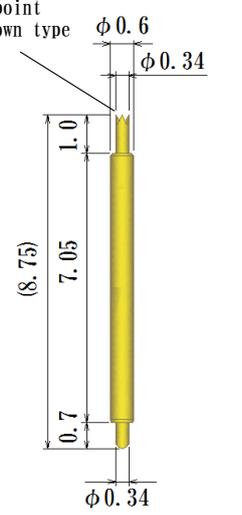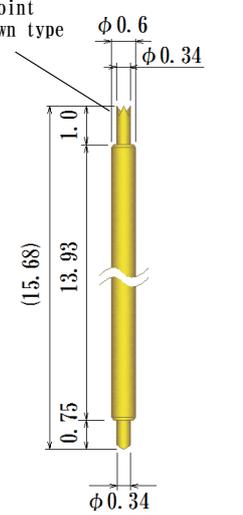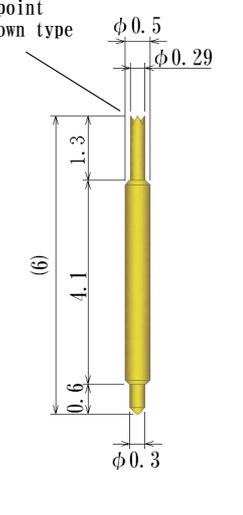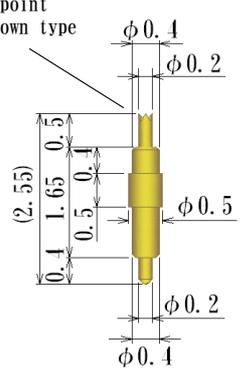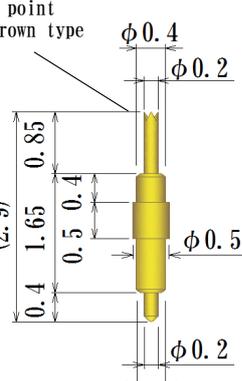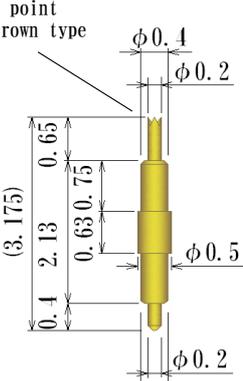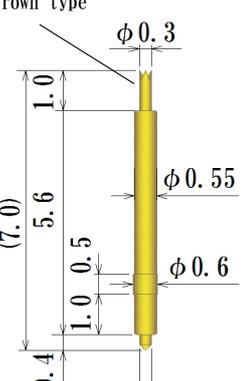 <p>4 point Reduced crown type</p> <p>0.274N (28gf) at 0.8mm travel Full travel 1.3mm Current rating 0.5A</p> <p>8YF58L1115-28G</p> <p>標準品</p>	 <p>4 point crown type</p> <p>0.294N (30gf) at 0.9mm travel Full travel 1.2mm Current rating 0.7A</p> <p>8YK-D60H-L875-SI</p>	 <p>4 point crown type</p> <p>0.367N (37.4gf) at 1.1mm travel Full travel 1.75mm Current rating 0.7A</p> <p>8YK-D60H-L157-SI</p>	 <p>4 point crown type</p> <p>0.294N (30gf) at 0.8mm travel Full travel 1.3mm</p> <p>8YF50L60G-SA-SI</p>
 <p>4 point crown type</p> <p>0.12N (12gf) at 0.55mm travel Full travel 0.6mm Current rating 0.3A</p> <p>8YF50L255-12GI</p> <p>標準品</p>	 <p>4 point crown type</p> <p>0.12N (12gf) at 0.55mm travel Full travel 0.6mm Current rating 0.3A</p> <p>8YF50L290-12G</p>	 <p>4 point crown type</p> <p>0.12N (12gf) at 0.55mm travel Full travel 0.6mm Current rating 0.3A</p> <p>8YF50L3175-12GL</p>	 <p>4 point crown type</p> <p>0.295N (12gf) at 0.8mm travel Full travel 1.2mm Current rating 0.5A</p> <p>8YK-D55H-L70-I</p>