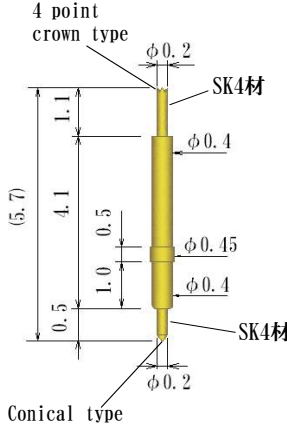
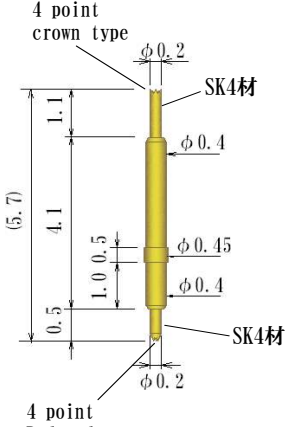
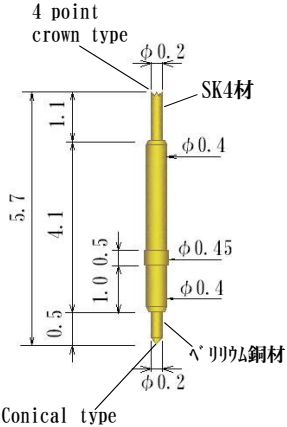
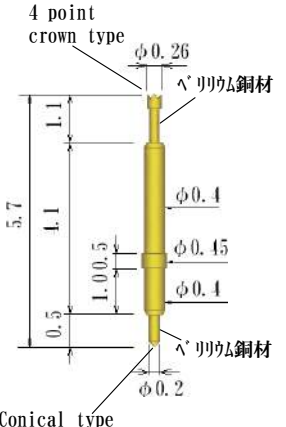
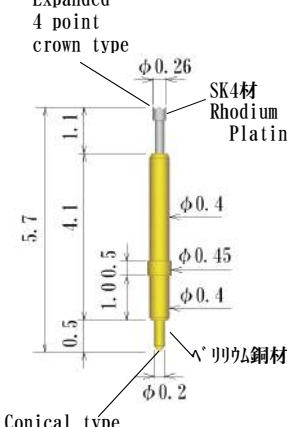
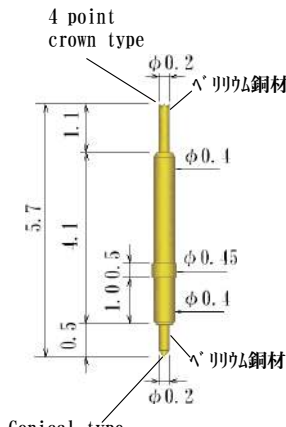
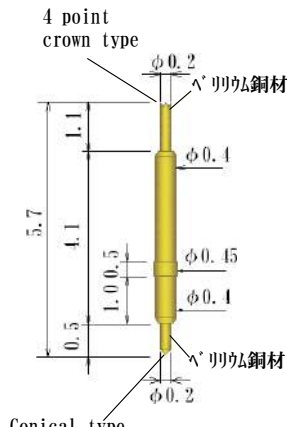
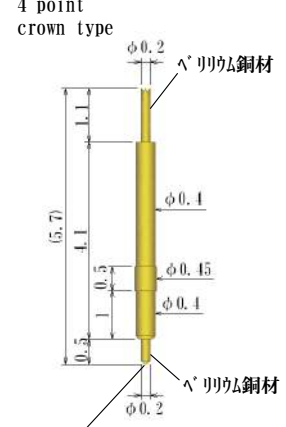


Double ended probe pin 両端プローブピン
Outer Dia. $\phi 0.40 \sim \phi 0.49\text{mm} / \phi 0.0157 \sim \phi 0.0193''$

<p>4 point crown type</p> <p>Preload 0.07N (7gf) 0.25N (25gf) at 0.4mm travel Current Rating 0.5A</p> <p>8YK-D38H-L37</p>	<p>4 point crown type</p> <p>0.245N (25gf) at 0.45mm travel Full travel 0.6mm Current Rating 0.5A</p> <p>8YK-D38H-L37-CRNI</p>	<p>4 point crown type</p> <p>SK4材</p> <p>0.297N (30gf) at 0.64mm travel Full travel 0.8mm Current Rating 0.5A</p> <p>8YK-D39H-L584-I</p>	
<p>4 point crown type</p> <p>0.229N (23.4gf) at 0.4mm travel Full travel 0.55mm Current Rating 0.5A</p> <p>8YK-D40H-L30</p>	<p>4 point crown type</p> <p>0.27N at 0.5mm travel Full travel 0.6mm max Current Rating 0.5A</p> <p>8YK-D40H-L34I</p>		

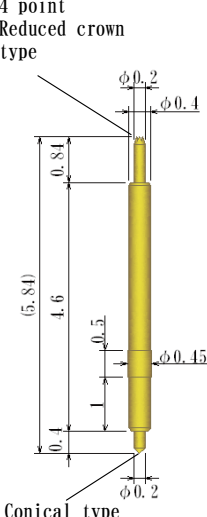
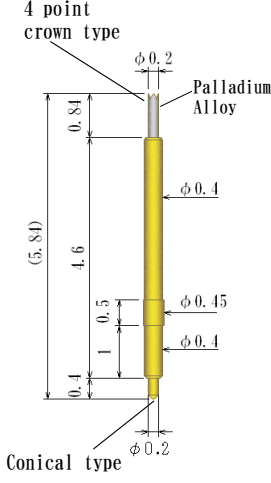
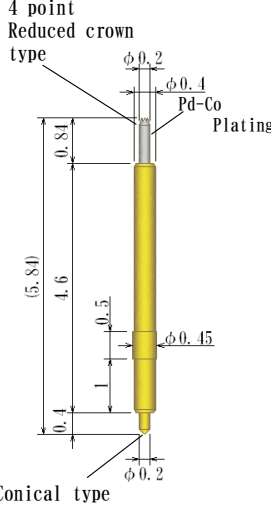
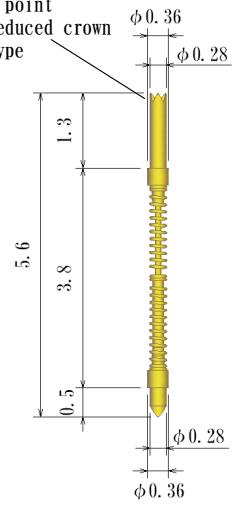
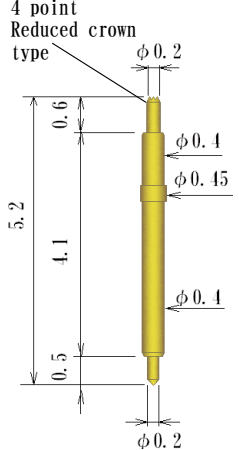
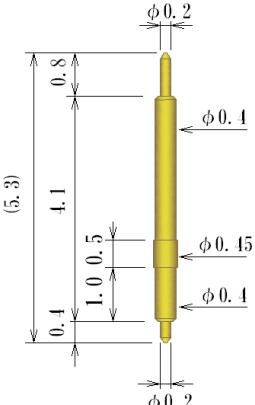
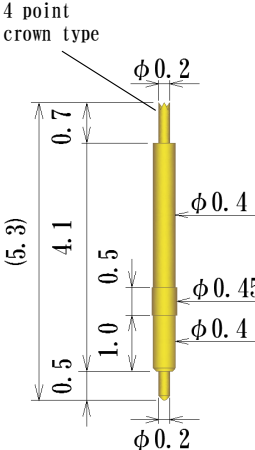
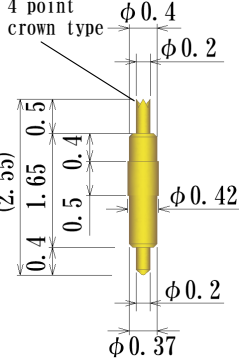
Double ended probe pin 両端プローブピン
Outer Dia. $\phi 0.40 \sim \phi 0.49\text{mm} / \phi 0.0157 \sim \phi 0.0193''$

 <p>4 point crown type SK4材 $\phi 0.2$ 1.1 4.1 $\phi 0.4$ 0.5 0.5 1.0 $\phi 0.45$ $\phi 0.4$ SK4材 $\phi 0.2$ Conical type</p> <p>0.228N (23.3gf) at 0.9mm travel Full travel 1.1mm Current rating 0.5A</p> <p>8YK-D40H-L57-AU-A (88YK-D40H-L57-AU-A)</p> <p>標準品</p>	 <p>4 point crown type SK4材 $\phi 0.2$ 1.1 4.1 $\phi 0.4$ 0.5 0.5 1.0 $\phi 0.45$ $\phi 0.4$ SK4材 $\phi 0.2$ 4 point Reduced crown type</p> <p>0.228N (23.3gf) at 0.9mm travel Full travel 1.1mm Current rating 0.5A</p> <p>8YK-D40H-L57-AUI (88YK-D40H-L57-AU)</p> <p>標準品</p>	 <p>4 point crown type SK4材 $\phi 0.2$ 1.1 4.1 $\phi 0.4$ 0.5 0.5 1.0 $\phi 0.45$ $\phi 0.4$ Expanded 4 point crown type SK4材 $\phi 0.2$ Conical type</p> <p>0.26N (26gf) at 0.9mm travel Full travel 1.1mm Current rating 0.5A</p> <p>8YK-D40H-L57-AUPI (88YK-D40H-L57-AUP)</p> <p>標準品</p>	 <p>Expanded 4 point crown type $\phi 0.26$ SK4材 $\phi 0.2$ 1.1 4.1 $\phi 0.4$ 0.5 0.5 1.0 $\phi 0.45$ $\phi 0.4$ Expanded 4 point crown type SK4材 $\phi 0.2$ Conical type</p> <p>Preload 0.04N (4gf) 0.228N (23.3gf) at 0.9mm travel Full travel 1.1mm Current rating 0.5A</p> <p>8YK-D40H-L57-BIGI</p>
 <p>Expanded 4 point crown type $\phi 0.26$ SK4材 Rhodium Plating $\phi 0.2$ 1.1 4.1 $\phi 0.4$ 0.5 0.5 1.0 $\phi 0.45$ $\phi 0.4$ Expanded 4 point crown type SK4材 $\phi 0.2$ Conical type</p> <p>Preload 0.04N (4gf) 0.228N (23.3gf) at 0.9mm travel Full travel 1.1mm Current rating 0.5A</p> <p>8YK-D40H-L57-BIGI-SI-RH</p>	 <p>4 point crown type $\phi 0.2$ SK4材 $\phi 0.2$ 1.1 4.1 $\phi 0.4$ 0.5 0.5 1.0 $\phi 0.45$ $\phi 0.4$ Expanded 4 point crown type SK4材 $\phi 0.2$ Conical type</p> <p>Preload 0.04N (4gf) 0.228N (23.3gf) at 0.9mm travel Full travel 1.1mm Current rating 0.5A</p> <p>8YK-D40H-L57I (88YK-D40H-L57)</p>	 <p>4 point crown type $\phi 0.2$ SK4材 $\phi 0.2$ 1.1 4.1 $\phi 0.4$ 0.5 0.5 1.0 $\phi 0.45$ $\phi 0.4$ Expanded 4 point crown type SK4材 $\phi 0.2$ Conical type</p> <p>0.26N (26gf) at 0.9mm travel Full travel 1.1mm Current rating 0.5A</p> <p>8YK-D40H-L57I-1 (88YK-D40H-L57-1)</p>	<p>High Temperature spec -40°C ~ +150°C</p>  <p>4 point crown type $\phi 0.2$ SK4材 $\phi 0.2$ 1.1 4.1 $\phi 0.4$ 0.5 0.5 1.0 $\phi 0.45$ $\phi 0.4$ Expanded 4 point crown type SK4材 $\phi 0.2$ Conical type</p> <p>0.26N (26.52gf) at 0.7mm travel Full travel 0.9mm Current rating 0.3A</p> <p>8YK-D40H-L57-BESUS (88YK-D40H-L57-BESUS)</p>

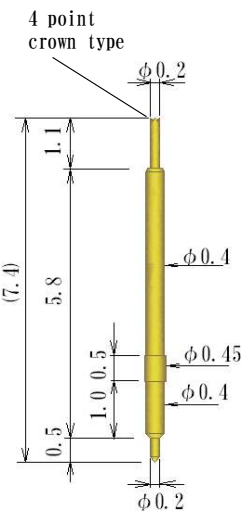
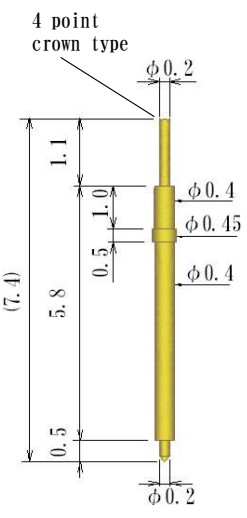
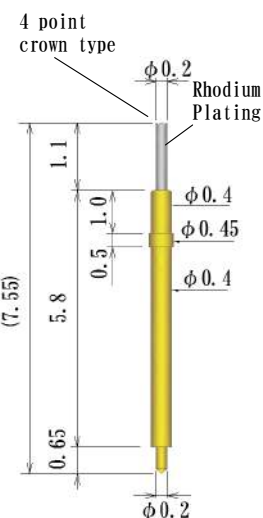
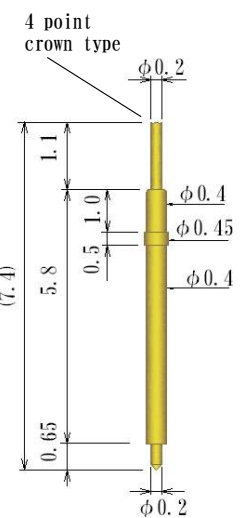
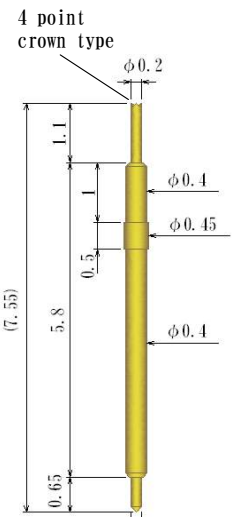
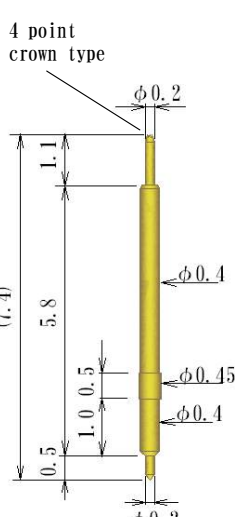
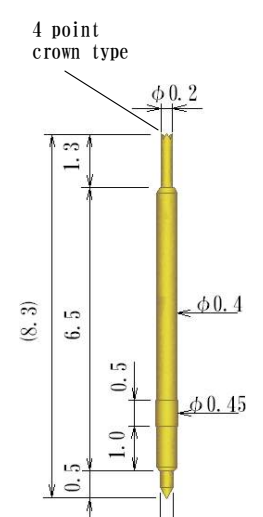
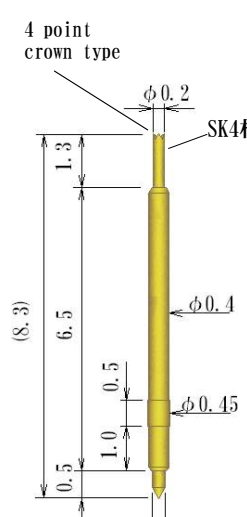
Double ended probe pin 両端プローブピン
Outer Dia. $\phi 0.40 \sim \phi 0.49\text{mm} / \phi 0.0157 \sim \phi 0.0193''$

<p>4 point crown type Rhodium Plating</p> <p>Preload 0.04N (4gf) 0.228N (23.3gf) at 0.9mm travel Full travel 1.1mm Current rating 0.5A</p> <p>8YK-D40H-L57-RHI (88YK-D40H-L57-RH)</p>	<p>4 point crown type Palladium Alloy</p> <p>Preload 0.04N (4gf) 0.26N (26.5gf) at 0.9mm travel Full travel 1.1mm Current rating 0.5A</p> <p>8YK-D40H-L57-PD-PI</p> <p style="text-align: center;">標準品</p>	<p>High Temperature spec -40°C ~ +150°C</p> <p>4 point crown type</p> <p>Preload 0.058N (5.9gf) 0.26N (26.5gf) at 0.7mm travel Full travel 0.9mm Current rating 0.5A</p> <p>8YK-D40H-L57-AUPSUSI (88YK-D40H-L57-AUPSUS)</p>	<p>4 point crown type</p> <p>Preload 0.098N (10gf) 0.34N (35gf) at 0.9mm travel Full travel 1.1mm Current rating 0.5A</p> <p>8YK-D40H-L57-AU-35G (88YK-D40H-L57-AU-35G)</p>
<p>High Temperature spec -40°C ~ +200°C</p> <p>Conical type</p> <p>0.275N (28gf) at 0.55mm travel Full travel 0.7mm Current rating 0.5A</p> <p>8YK-D40H-L57-CNHIJ (88YK-D40H-L57-CNHIJ)</p> <p style="color: green;">非磁性仕様ピン Non magnetic type</p>	<p>High Temperature spec -40°C ~ +200°C</p> <p>4 point crown type</p> <p>0.275N (28gf) at 0.55mm travel Full travel 0.7mm Current rating 0.5A</p> <p>88YK-D40H-L57-HIJ-CR</p> <p style="color: green;">非磁性仕様ピン Non magnetic type</p>	<p>4 point Reduced crown type</p> <p>0.228N (23.3gf) at 0.9mm travel Full travel 1.1mm Current rating 0.5A</p> <p>8YK-D40H-L57-AU-TPCRNI (88YK-D40H-L57-AU-TPCRN)</p> <p style="text-align: center;">標準品</p>	

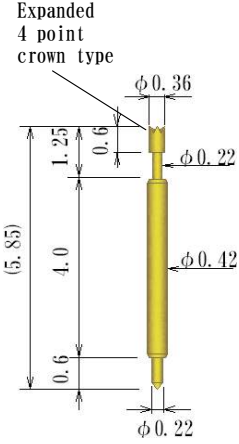
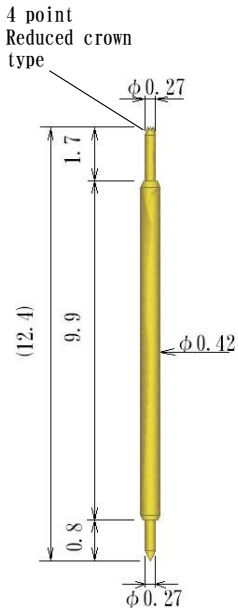
Double ended probe pin 両端プローブピン
Outer Dia. $\phi 0.40 \sim \phi 0.49\text{mm} / \phi 0.0157 \sim \phi 0.0193''$

 <p>4 point Reduced crown type</p> <p>Conical type</p> <p>0.297N (30gf) at 0.64mm travel Full travel 0.8mm</p> <p>8YK-D39H-L584TPC-S</p>	 <p>4 point crown type</p> <p>Palladium Alloy</p> <p>Conical type</p> <p>0.297N (30gf) at 0.64mm travel Full travel 0.8mm</p> <p>8YK-D39H-L584-PD33EE</p>	 <p>4 point Reduced crown type</p> <p>Pd-Co Plating</p> <p>Conical type</p> <p>0.297N (30gf) at 0.64mm travel Full travel 0.8mm</p> <p>8YK-D39H-L584TPC-PDCOI</p>	<p>Outer Spring Type</p>  <p>4 point Reduced crown type</p> <p>0.412N (42gf) at 1.05mm travel Full travel 1.1mm Current rating 1.0A</p> <p>8YB-D32H-L56-TPC</p> <p>外バネ構造のプローブピンです。 接触性、及び耐久性に優れています。</p> <p>Outer spring type probe pin. Low electrical resistance and high durability.</p>
 <p>4 point Reduced crown type</p> <p>0.32N (32gf) at 0.7mm travel Full travel 0.9mm Current rating 0.5A</p> <p>8YK-D40H-L52-TPCRNI</p>	 <p>4 point crown type</p> <p>0.245N (25gf) at 0.45mm travel Full travel 0.6mm Current rating 0.5A</p> <p>8YK-D40H-L53-CONI</p>	<p>High Temperature spec -40°C ~ +150°C</p>  <p>4 point crown type</p> <p>0.26N (25gf) at 0.7mm travel Full travel 0.9mm Current rating 0.5A</p> <p>88YK-D40H-L53-SUS</p>	 <p>4 point crown type</p> <p>0.147N (15gf) at 0.55mm travel Full travel 0.6mm Current rating 0.3A</p> <p>8YF45L255-15G</p>

Double ended probe pin 両端プローブピン
Outer Dia. $\phi 0.40 \sim \phi 0.49\text{mm} / \phi 0.0157 \sim \phi 0.0193''$

 <p>4 point crown type</p> <p>0.294N (29.9gf) at 0.9mm travel Full travel 1.1mm Current rating 0.5A</p> <p>8YK-D40H-L74-AU30</p>	 <p>4 point crown type</p> <p>Preload 0.07N (7gf) 0.25N (25gf) at 0.9mm travel Full travel 1.3mm Current rating 0.5A</p> <p>8YK-D40H-L74I</p>	 <p>4 point crown type</p> <p>Rhodium Plating</p> <p>Preload 0.07N (7gf) 0.25N (25gf) at 0.9mm travel Full travel 1.3mm Current rating 0.5A</p> <p>8YK-D40H-L74-RHI</p>	 <p>4 point crown type</p> <p>Preload 0.07N (7gf) 0.39N (40gf) at 0.95mm travel Full travel 1.4mm Current rating 0.5A</p> <p>8YK-D40H-L74-2</p>
 <p>4 point crown type</p> <p>Preload 0.068N (7.0gf) 0.392N (40gf) at 0.9mm travel Full travel 1.4mm</p> <p>8YK-D40H-L74-3MI</p>	 <p>4 point crown type</p> <p>0.246N (25.1gf) at 0.55mm travel Full travel 1.0mm Current rating 0.5A</p> <p>8YK-D40H-L74TPC-HIJ 非磁性仕様ピン Non magnetic type</p>	 <p>4 point crown type</p> <p>0.27N (27.5gf) at 0.55mm travel Full travel 1.0mm Current rating 0.5A</p> <p>8YK-D40H-L83-HIJI 非磁性仕様ピン Non magnetic type</p>	 <p>4 point crown type</p> <p>SK4材</p> <p>0.27N (27.5gf) at 1.2mm travel Full travel 1.5mm Current rating 0.5A</p> <p>8YK-D40H-L83</p>

Double ended probe pin 両端プローブピン
Outer Dia. $\phi 0.40 \sim \phi 0.49\text{mm} / \phi 0.0157 \sim \phi 0.0193''$

 <p>Expanded 4 point crown type</p> <p>Preload 0.12N (12.2gf) 0.343N (35gf) at 0.65mm travel Full travel 0.8mm Current rating 0.5A</p> <p>8YF42L58I</p>	 <p>4 point Reduced crown type</p> <p>Preload 0.107N (11gf) 0.392N (39.9gf) at 0.9mm travel Full travel 2.34mm Current rating 0.5A</p> <p>8YD42124L-WG-RDCRI</p>		