



Double ended probe pin 両端プローブピン
Outer Dia. $\phi 0.31 \sim \phi 0.39\text{mm} / \phi 0.0122 \sim \phi 0.0154''$

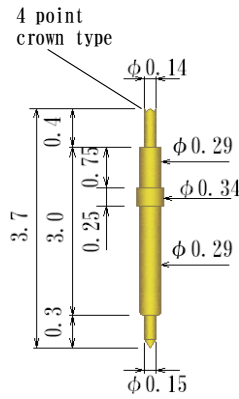


Part No.	Preload	Recommended travel	Full travel	Current rating	Top Plunger material	Spring material
8YF34L385GI	0.06N (6gf)	0.17N (17gf) at 0.4mm travel	0.6mm	0.3A	Beryllium Copper	SWP
8YF34L385G-AUS18GI	-				SK4	
8YF34L385G-AUI	-				Beryllium Copper	

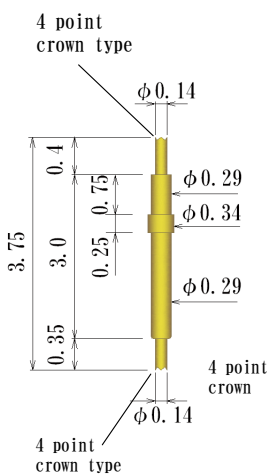


Preload 0.06N (6gf)
0.17N (17gf) at 0.4mm travel
Full travel 0.6mm
Current rating 0.3A

8YF34L385G-AI

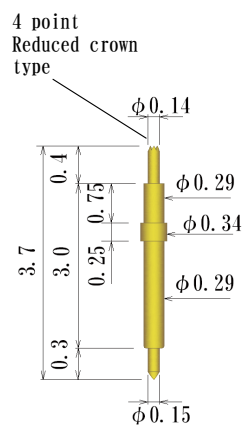


0.247N (25.2gf) at 0.4mm travel
Full travel 0.6mm
Current rating 0.5A

8YF34L385G-1I

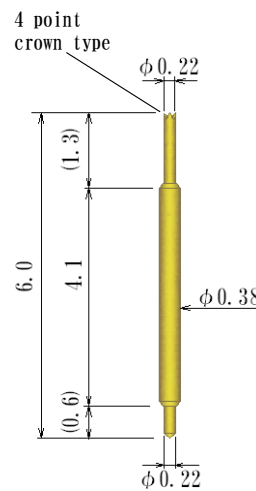

0.245N (25gf) at 0.8mm travel
Full travel 1.1mm
Current rating 0.5A


8YF38L60GI-AU

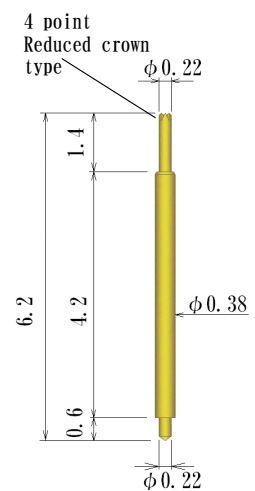

0.245N (25gf) at 0.8mm travel
Full travel 1.1mm
Current rating 0.5A


8YF38L62G-AU

Double ended probe pin 両端プローブピン
Outer Dia. $\phi 0.31 \sim \phi 0.39\text{mm} / \phi 0.0122 \sim \phi 0.0154''$

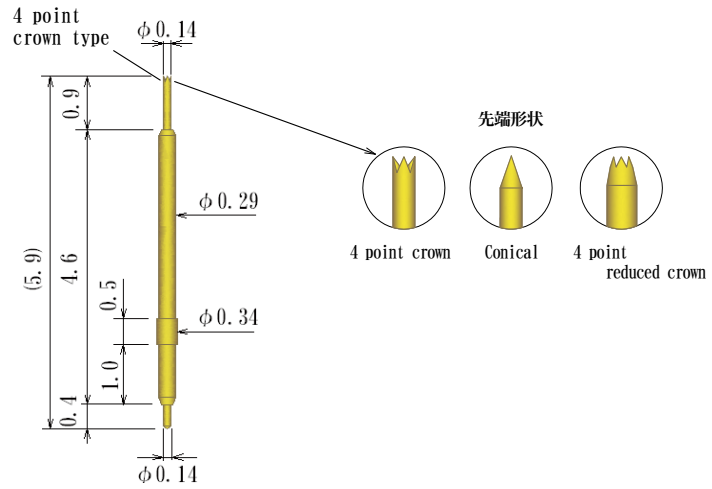


Part No.	Recommended travel	Full travel	Current rating	Plunger head style	Top plunger material	Spring material	
8YK-D29H-L59-PDC01	0.245N (25.0gf) at 0.7mm travel	0.8mm	0.3A	4 point crown type	SK4 Pd platrd	SWP	-
8YK-D29H-L59-PDI					Palladium Alloy		-
8YK-D29H-L59-SI					SK4		-
8YK-D29H-L59-SI-SUS					SK4	SUS	注3)
8YK-D29H-L59-PT90-HIJ					Beryllium copper	NAS	注1) 注2)
8YK-D29H-L59-SI-TP					4 point reduced crown type	Beryllium coppe	-
8YK-D29H-L59-PD31EE	0.297N (30 gf) at 0.64mm travel	0.9mm		4 point crown type	Palladium Alloy	SWP	-
8YK-D29H-L59-PD31EE-CON	0.303N (31gf) at 0.7mm travel			Conical	Palladium Alloy		-

注1) High Temperature spec -40°C ~ +200°C
 注2) 非磁性仕様ピン Non magnetic type
 注3) High Temperature spec -40°C ~ +150°C

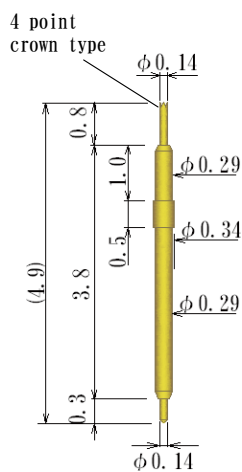


0.293N (29.9gf) at 0.55mm travel
 Full travel 0.65mm
 Current rating 0.3A

8YK-D29H-L49I

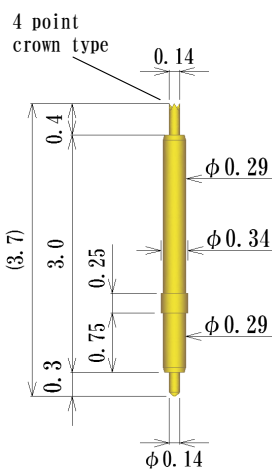


0.245N (25gf) at 0.4mm travel
 Full travel 0.6mm
 Current rating 0.3A

8YK-D29H-L37I

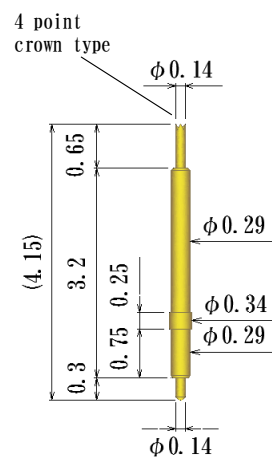

0.26N (26.5gf) at 0.45mm travel
 Full travel 0.55mm
 Current rating 0.3A



8YK-D29H-L415
(88YK-D29H-L415)

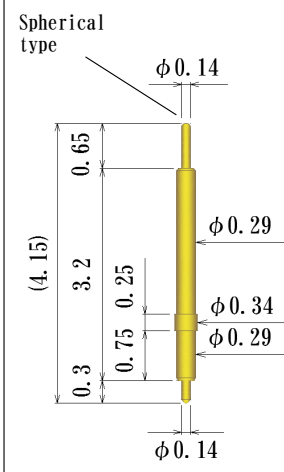

0.26N (26.5gf) at 0.45mm travel
 Full travel 0.55mm
 Current rating 0.3A

8YK-D29H-L415-R
(88YK-D29H-L415-R)

Double ended probe pin 両端プローブピン
Outer Dia. $\phi 0.31 \sim \phi 0.39\text{mm} / \phi 0.0122 \sim \phi 0.0154''$

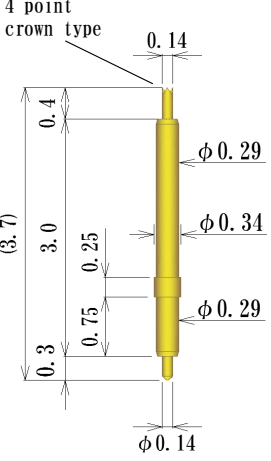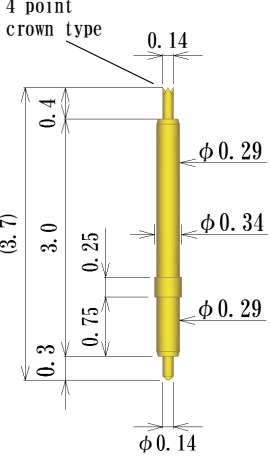 <p>4 point crown type</p> <p>0.14</p> <p>0.4</p> <p>$\phi 0.29$</p> <p>$\phi 0.34$</p> <p>$\phi 0.29$</p> <p>0.3</p> <p>0.75</p> <p>0.25</p> <p>3.0</p> <p>(3.7)</p> <p>0.14</p> <p>0.245N (25gf) at 0.4mm travel Full travel 0.6mm Current rating 0.3A</p> <p>8YK-D29H-L37-EE</p>	<p>High Temperature spec -40°C ~ +150°C</p>  <p>4 point crown type</p> <p>0.14</p> <p>0.4</p> <p>$\phi 0.29$</p> <p>$\phi 0.34$</p> <p>$\phi 0.29$</p> <p>0.3</p> <p>0.75</p> <p>0.25</p> <p>3.0</p> <p>(3.7)</p> <p>0.14</p> <p>0.216N (22gf) at 0.4mm travel Full travel 0.5mm Current rating 0.3A</p> <p>8YK-D29H-L37EE-SUS</p>		
--	--	--	--