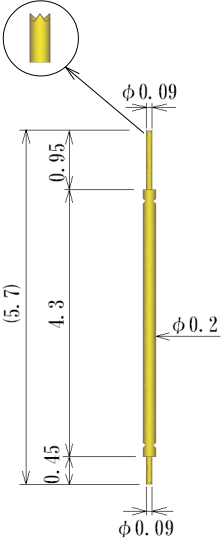
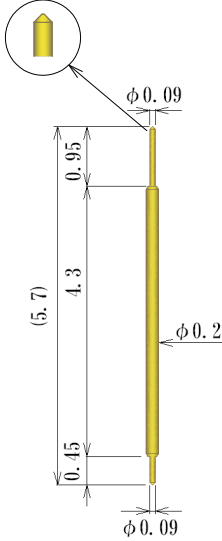
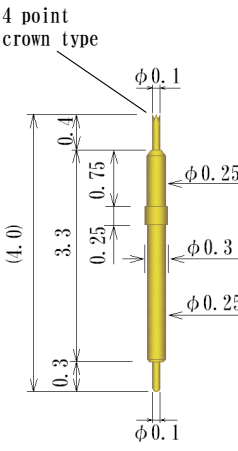
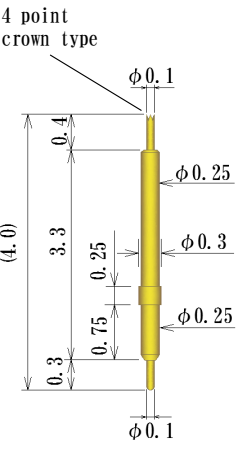
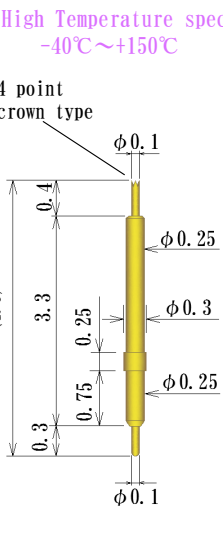
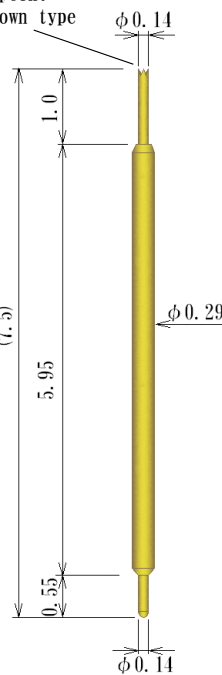
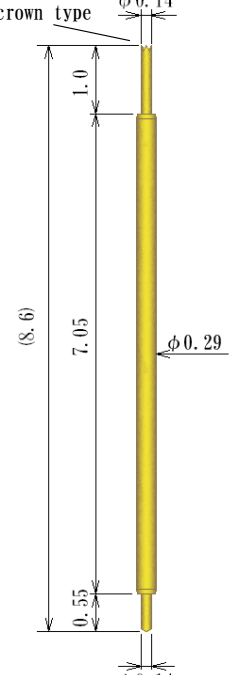
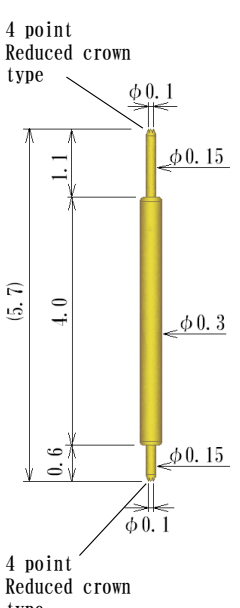


Double ended probe pin 両端プローブピン
Outer Dia. $\phi 0.30\text{mm}/\phi 0.0118''$ or smaller

 <p>Preload 0.049N (4.99gf) 0.196N (20gf) at 0.6mm travel Full travel 0.7mm Current rating 0.1A</p> <p>8YK-D20H-L57-AU</p>	 <p>Preload 0.049N (4.99gf) 0.196N (20gf) at 0.6mm travel Full travel 0.7mm Current rating 0.1A</p> <p>88Y-D20H-L57-CON</p>	 <p>0.245N (25gf) at 0.4mm travel Full travel 0.5mm Current rating 0.3A</p> <p>8YK-D25H-L40I</p>	 <p>0.245N (25gf) at 0.4mm travel Full travel 0.5mm Current rating 0.3A</p> <p>8YK-D25H-L40I-RV</p>
<p>High Temperature spec $-40^{\circ}\text{C} \sim +150^{\circ}\text{C}$</p>  <p>0.226N (23gf) at 0.4mm travel Full travel 0.5mm Current rating 0.3A</p> <p>8YK-D25H-L40I-SUS</p>	 <p>0.196N (20gf) at 0.9mm travel Full travel 1.2mm Current rating 0.3A</p> <p>8YK-D29H-L75-SI</p>	 <p>Preload 0.032N (3.3gf) 0.196N (20gf) at 0.9mm travel Full travel 1.2mm Current rating 0.3A</p> <p>8YK-D29H-L86-S60</p>	 <p>0.245N (25gf) at 0.6mm travel Full travel 1.0mm Current rating 0.3A</p> <p>8YK-D30H-L57-TPC-K</p>