


**Test & Burn-In Socket, GU31 molded frame series**  
**Size 31x46mm / 1.22x1.81"**

Acceptable device size

max □ 17mm/0.67"

In the case of larger size, consult factory.

Any device on 0.30mm pitch or larger

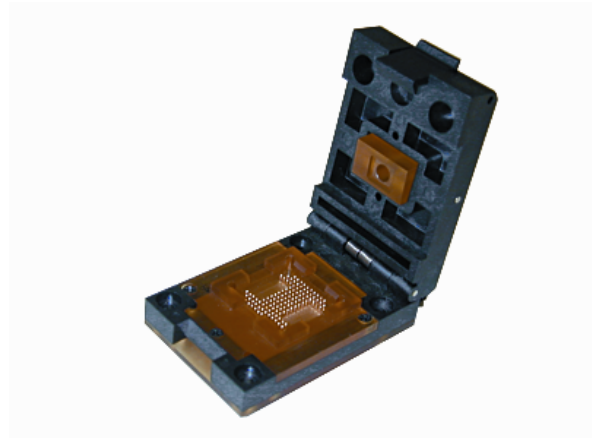

How to order

**GU31-□□□□□□□□**

P/N will be informed after fixing specifications.

example)

PCB Pattern (Top View)

Guide Pin Through Hole

Features:

- High reliability
- Cost competitive
- Short delivery time
- Temperature -40°C to +150°C (typical)

device (105°)

周波数 vs インダクタンス特性

N	STIMULUS	VAL
1	1 MHz	1.6247 nH
2	10 MHz	1.2448 nH
3	50 MHz	1.1425 nH
4	100 MHz	1.1131 nH
5	500 MHz	1.0646 nH
6	1 GHz	1.0366 nH
7	1.8 GHz	981.46 pH