

## High Voltage Connector 高電圧コネクタ

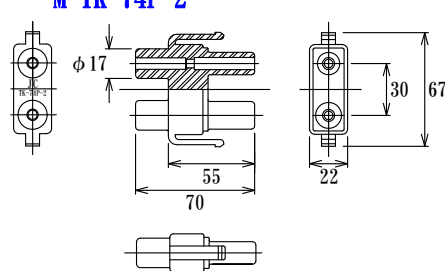
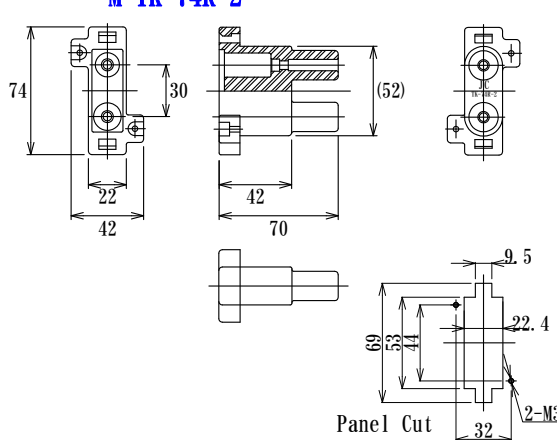
DC30KV

## Specification

Current rating: 3A  
 Dielectric Strength: DC 30KV 1 minute at sea level  
 Insulation Resistance: DC1000V 100M $\Omega$  min  
 Contact Resistance: 3m $\Omega$  max  
 Temperature range: -10 $^{\circ}$ C~+80 $^{\circ}$ C

## Material

Insulator: PBT, glass filled  
 Plug pin: Brass, Phosphor bronze, Gold plating over Ni  
 Socket pin  
 Louver: Beryllium Copper, Heat treated  
 Gold Plated over Ni plating  
 Sleeve: Brass, Gold Plating over Ni plating

プラグインシュレータ Plug Insulator <b>M-TK-74P-2</b>	ソケットインシュレータ Socket Insulator <b>M-TK-74R-2</b>												
 <p>Plug Pin</p> <table border="1" data-bbox="319 1164 758 1243"> <thead> <tr> <th>Part number</th> <th>Wire</th> </tr> </thead> <tbody> <tr> <td><b>UJCP-F30CRMP-TK (20)</b></td> <td>AWG#20~#24</td> </tr> <tr> <td><b>UJCP-F30CRMP-TK (16)</b></td> <td>AWG#16~#20</td> </tr> </tbody> </table>	Part number	Wire	<b>UJCP-F30CRMP-TK (20)</b>	AWG#20~#24	<b>UJCP-F30CRMP-TK (16)</b>	AWG#16~#20	 <p>Socket Pin</p> <table border="1" data-bbox="957 1164 1396 1243"> <thead> <tr> <th>Part number</th> <th>Wire</th> </tr> </thead> <tbody> <tr> <td><b>UJCS-F30CRMP-TK (20)</b></td> <td>AWG#20~#24</td> </tr> <tr> <td><b>UJCS-F30CRMP-TK (16)</b></td> <td>AWG#16~#20</td> </tr> </tbody> </table>	Part number	Wire	<b>UJCS-F30CRMP-TK (20)</b>	AWG#20~#24	<b>UJCS-F30CRMP-TK (16)</b>	AWG#16~#20
Part number	Wire												
<b>UJCP-F30CRMP-TK (20)</b>	AWG#20~#24												
<b>UJCP-F30CRMP-TK (16)</b>	AWG#16~#20												
Part number	Wire												
<b>UJCS-F30CRMP-TK (20)</b>	AWG#20~#24												
<b>UJCS-F30CRMP-TK (16)</b>	AWG#16~#20												

○ピンと電線の結線に圧着工具が必要です。

Crimping Tool is needed.

○ピン(ソケット、プラグ 共共通) 組込み後、ピン抜き治具を使用するとピンを引き抜けます。

Both pins (socket and plug) are removal with pin removal tool.

○工具、治具は専用ですのでお問い合わせください。

Please consult factory about tools.

How to order (example)

<b>M-TK-74P-2</b>	50pcs
<b>UJCP-F30CRMP-TK (16)</b>	100pcs
<b>M-TK-74R-2</b>	50pcs
<b>UJCS-F30CRMP-TK (16)</b>	100pcs

